

THROUGH-FEED BOOTH FOR MANUAL COATING

The manual coating booth Classic L-10 is designed for the double-sided manual coating with a conveyor system. But this booth can be used as simple automatic system as well.





THE ADVANTAGES OF THE CLASSIC STANDARD BOOTH:

- Powder coated steel booth
- Stainless steel booth floor
- Integrated Illumination
- 2 mobile 80 l powder collecting hoppers
- Service doors for simplified filter cartridge changing
- Supervision of minimal exhaust air volume

Technical Data Classic L-10, Standard Styling

(other dimensions on request)

Width:	3400 mm / 3800 mm
Height:	3308 mm
Length:	4600 mm / 5300 mm
Manual openings:	700 × 1000 mm
Filter:	2 × 5 filter cartridges
Filter area:	200 m ²
Cleaning:	Jet with Venturi
Power:	2 × 3 kW, 3 × 380 V – 420 V, 50 Hz
Exhaust air:	Nominal 12,400 m ³ /h Working range 9000–10,200 m ³ /h
Air consumption:	with powder collecting hoppers max. 30 Nm ³ /h, without powder collecting hoppers max. 100 Nm ³ /h
Option:	– 2 × 30 l powder hopper, fluidized, with vibrating sieves – Level sensor

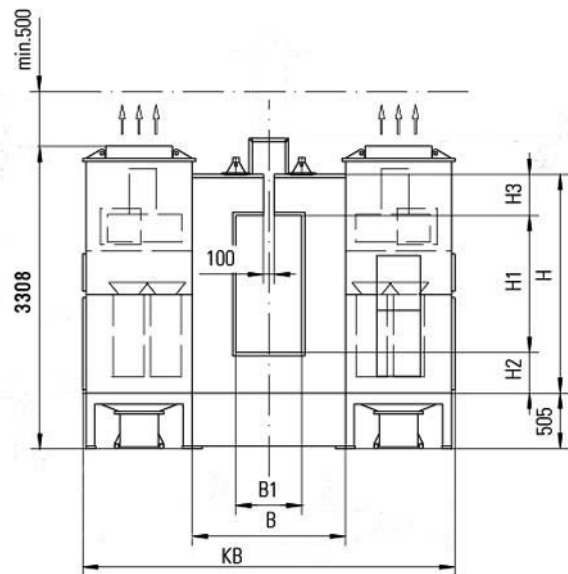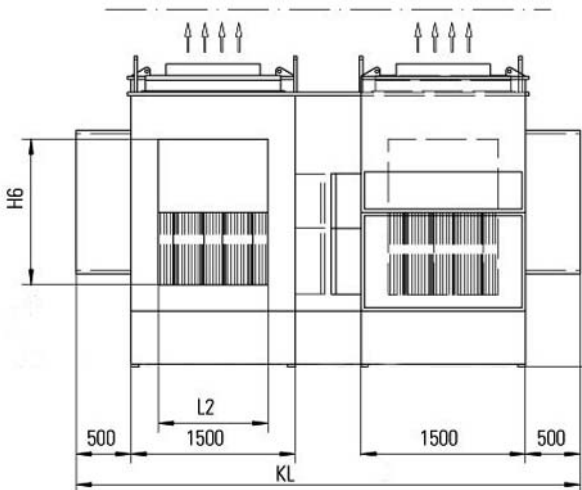

B	= 1400 / 1800 mm
B1	= 400–1000 mm
H	= 1400–2800 mm
H1	= 1000–2000 mm
H2	= min. 100 mm
H3	= min. 300 mm
H6	= 1000–2000 mm
KB	= 3400 / 3800 mm
KL	= 4600 / 5300 mm
L2	= 700–1000 mm

Other dimensions on request.

ITW Gema AG
Mövenstrasse 17
CH-9015 St.Gallen
Switzerland

Tel. (+41) 71-313 83 00
Fax (+41) 71-313 83 83
info@itwgema.ch
www.itwgema.ch

ITW Gema AG reserves the right to make technical changes without prior notice.